


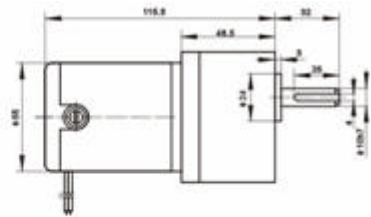





The PMDC motor has such features: high efficiency, low noise, and with the outside brush rocker constructional feature, high quality and anti-abrasive brush, long-using time. The motor is widely used in lamphouse of advertisement, massagers..



Type	Rated voltage V	No-load speed r/min	Rated current A	Rated torque mN.m	Rated speed r/min	Rated power W
55ZY12-15	12	3000	2	65	2200	15
55ZY12-25	12	4000	3,8	80	3000	25
55ZY24-15	24	3000	1	65	2200	15
55ZY24-25	24	4000	1,8	80	3000	25

Type	Speed range r/min	Power range W	Voltage range V
55ZY	1500~2000	≤10	12~90 DC
	2000~3000	≤25	
	3000~5000	≤40	

55ZY/60JB ratio range: 1:3 - 1:180 **55ZY/66JB** ratio range: 1:10 - 1:180 **55ZY/70JB** ratio range: 1:3 - 1:180

UGAB Components AB

Box 64
SE-243 22 Höör

Telefon
+46 (0)413-245 40

Telefax
+46 (0)413-231 83

E-post
post@ugab.se

URL
www.ugab.se