
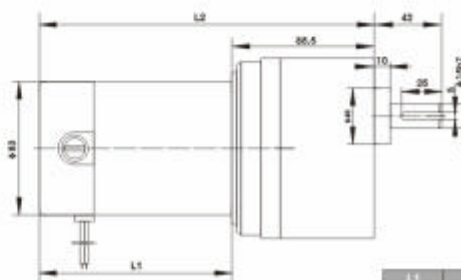
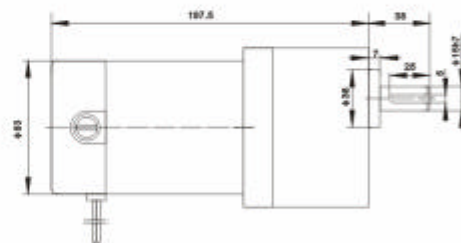
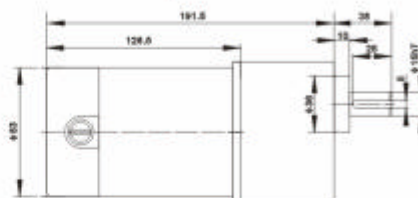
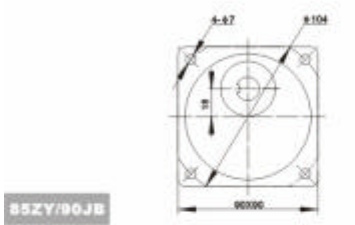
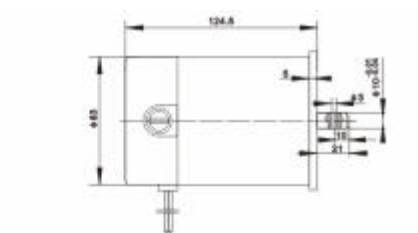


The PMDC motor has such features: high efficiency, low noise, and with the outside brush rocker constructional features, high quality and anti-abrasive brush, long-using time, built-in rectifier. The motor is widely used in all kinds of house-hold electrical appliances.

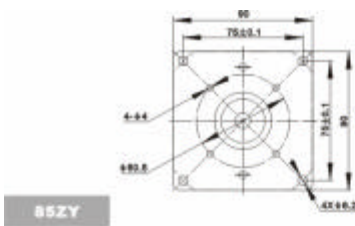

| L1 | L2 |
|-------|-----|
| 118.6 | 208 |
| 160.5 | 249 |

| Type | Rated voltage V | No-load speed r/min | Rated current A | Rated torque mN.m | Rated speed r/min | Rated power W |
|-----------|-----------------|---------------------|-----------------|-------------------|-------------------|---------------|
| 85ZY24-90 | 24 | 2800 | 4,5 | 350 | 2500 | 90 |

85ZY/90JB ratio range: 1:3 - 1:180 **85ZY/96JB** ratio range: 1:3 - 1:120 **85ZY/106JB** ratio range: 1:10 - 1:80

UGAB Components AB

Box 64
SE-243 22 Höör

Telefon
+46 (0)413-245 40

Telefax
+46 (0)413-231 83

E-post
post@ugab.se

URL
www.ugab.se